


GlobalFoundries 12LP/LP+ & 22FDX EFLX[®]4K eFPGA Tiles

The EFLX[®]4K Tile is an embeddable standalone FPGA IP core, with 3 versions, that communicates with the rest of your SoC using input and output pins on the edges. For more logic capacity we can abut tiles to make larger arrays (up to ~8x8) with any combination of tile versions.

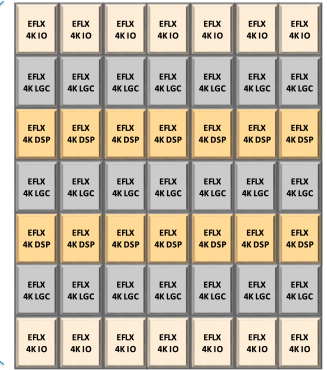


The three versions of the EFLX tile are described below – they are all the same dimensions so they can be intermixed in arrays. The DSP MAC is a 22x22 multiplier with 48-bit accumulator arranged in 4 row of 10 pipelined MACs.

EFLX 4K Versions:	EFLX 4K Logic Tile	EFLX 4K DSP Tile	EFLX 4K IO Tile
Clock inputs	1 to 8		
Look-upTables (6-input LUT with 2 independent outputs)	2,520 (~4.0K LUT4)	1,880 (~3.0K LUT4)	2,184 (~3.5K LUT4)
Total Flips Flops (ex DSP MACs)	6,304	5,024	7,648
Distributed Memory	21 Kbits	1 Kbits	21 Kbits
22-bit DSP MACs	0	40	0
Input & Output Pins, with optional flip flop	632 input & 632 output		1640 inputs & 1640 outputs

The EFLX 4K tiles have numerous input and output pins. Each input or output pin has a bypassable flip flop. When multiple cores are concatenated into EFLX arrays, the pins along the abutting edges are disabled or are used for controlling embedded RAM blocks (BRAMs).

Besides input/output pins, there are clock, configuration, and test/DFT pins. Each Core has an internal power grid which can be connected to the customer's digital SoC power grid. The Core also has configuration inputs on the West side and configuration inputs on the South side to load the bitstream. An AXI or JTAG interface is available for configuration. A clock mesh provides multiple connection points. The configuration bits can be read back anytime to enable checking for soft errors to improve reliability for high-reliability applications.

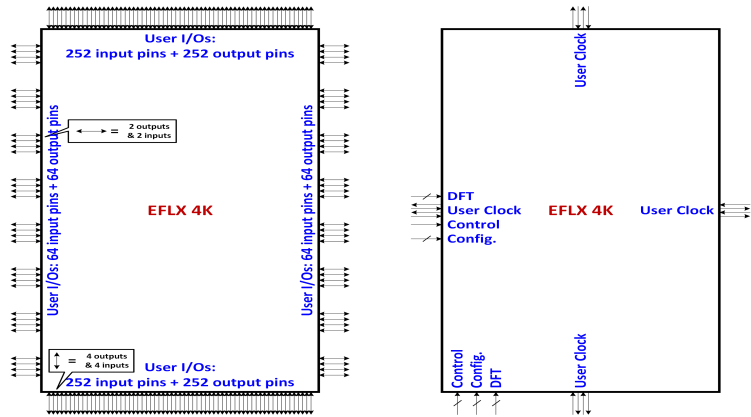

EFLX 4K Logic/DSP input/output map (IO tile has more IO top+bottom)

Node	GF12LP/12LP+			GF22FDX
EFLX Generation	2.0	2.0	2.0	2.3
Special Features	Single Rail	Dual Rail for external power gating	Rad Hard by Design	Forward body bias support
Metal Stack	3Mx_2Cx_4Kx IP top layer: K4 (M9)			9M_2Mx_3Cx_2Bx_11x_10x IP top layer: OI (M9)
Nominal Supply Voltages (Vj)	0.6, 0.7, 0.8, 0.9			0.8
Temperature Range	-40° to +125° C Tj			
Availability	Silicon Validated			Available
Leakage Power	7.2 mW (TT, 0.8Vj, 25C Tj)		10.6 mW (TT, 0.8Vj, 25C Tj)	1.1 mW (TT, 0.8Vj, 25C Tj) est.
Area (mm ²)	1.24	1.36	1.57	2.66

Evaluation Licenses are available free for you to try your RTL on our EFLX Compiler for your node/array size/features to check performance: timing is available for multiple process corners.

When you integrate EFLX eFPGA into your SoC/ASIC, our engineering team will work closely with you. We have a detailed architectural specification and numerous deliverables. We help you with design, DFT and production test. We are with you all the way through production ramp.

Deliverables and EDA Design Views	
Front-end Design view (with NDA)	Back-end Design Views (with License)
Encrypted Verilog Netlist	Encrypted Verilog Netlist with Timing Annotation & SDF
LIB	GDS-II
Footprint LEF	CDL/Spice netlist
Detailed datasheet & DSP User's Guide	Integration guidelines & assistance
Silicon validation report available	Test Vectors for DFT test coverage
EFLX Compiler evaluation version	EFLX Compiler bitstream generation version

Evaluation boards are available for some process nodes.